

SPECIFICATION SHEET

Item no. 105969
Item description Lamp Sea Explorer nickel finish
Category Lighting
Type Pendants/Lanterns/Chandeliers



ITEM MEASUREMENTS

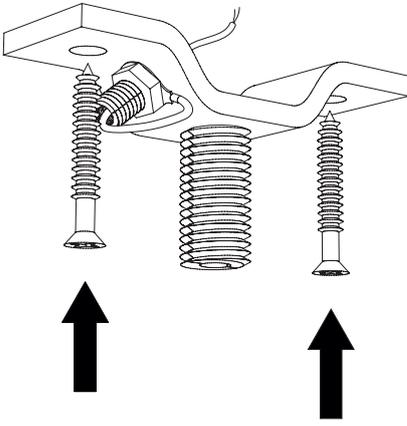
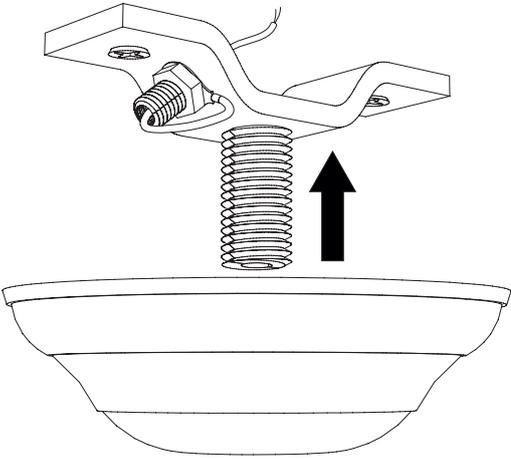
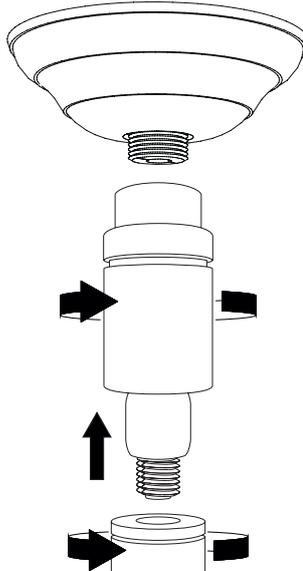
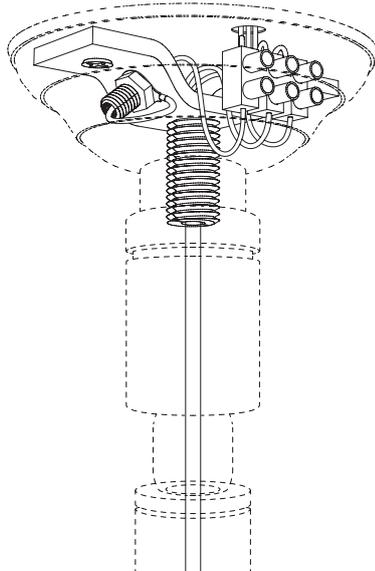
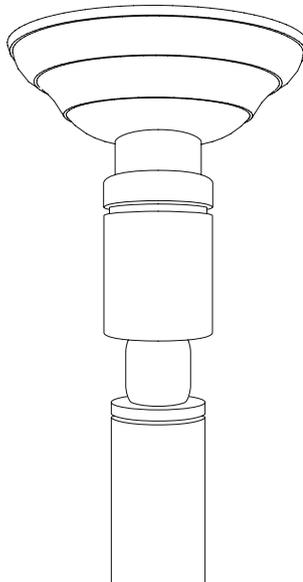
Dimensions (cm) ø 48 x H. 68 cm
Dimensions (inch) 18.9" dia x 26.77" H
Wall/ceiling plate dimensions (cm) ø 12 x H. 13 cm
Wall/ceiling plate dimensions (inch) 4.72" dia x 5.12" H
Net weight (kg) 8

SPECIFICATIONS

Material(s) Aluminium | Brass | Glass | Stainless steel
Finish(es)/colour(s) Nickel finish | clear glass
Suitable for Indoor use/dry locations only
Lamp holder type | qty E27 | 1
Hanging method | length (cm) Pipe | 20+30+50cm pipe
Hanging method | length (inch) 7.87"+11.81"+19.69"
Ceiling canopy dimensions ø 12 x H. 13 cm
Switch No
Wire type 2 x 0,75
Wire length (cm) 250
Wire length (inch) 98,43
Plug type Not applicable
Max. wattage 40 watt
Voltage 220 - 240 Volt
Stainless steel grade SAE 202

PACKAGE INFORMATION (MTR/KG)

Package measurements 0,585 x 0,585 x 0,665
Volume 0,2276
Gross weight (kg) 14,00

<p>1</p> 	<p>2</p> 
<p>3</p> 	<p>4</p> 
<p>5</p> 	<p>This product is for indoor use only. Outdoor use could result in shock, fire or serious bodily injury or death. All wiring must be done in accordance with national and local electric codes. It is strongly recommended that you use a qualified electrician.</p> <p>Turn-off the electricity supply at the main circuit panel before installing. Do not connect the electricity supply until your lamp is fully assembled and installed.</p> <p>Place the lightbulb before mounting the luminaire.</p> <p>Fix the ceiling bracket to the ceiling by using mounting plugs and screws suitable to your ceiling type and take into account the weight of your luminaire.</p> <p>Determine the desired height of your luminaire and thread the wires through the extension pipes and the retaining nut. Place or hold the lamp in an elevated position in such a way that the wires can freely reach the ceiling junction box.</p> <p>Now slide the canopy over the ceiling bracket and thread the wire through the ceiling bracket. Connect the 3 power wires according to their colours. Brown is the live wire, blue is the neutral wire, green/yellow is the earth wire.</p> <p>Screw the retaining nut on the ceiling bracket and fix it as securely as possible.</p>